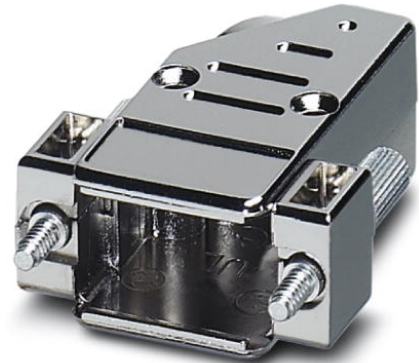



**VS-09-T-20-1-S-A**

Order No.: 1655661

<http://catalog.phoenixcontact.net/phoenix/treeViewClick.do?UID=1655661>D-SUB sleeve housing, shell size 1, shielded, IP20 degree of  
protection**Commercial data**

EAN	 4 046356 029551
Pack	1 Pcs.
Customs tariff	85389099
Product key	102500
Catalog page information	Page 441 (PC-2011)

**Product notes**WEEE/RoHS-compliant since:  
05/24/2006

[http://  
www.download.phoenixcontact.com](http://www.download.phoenixcontact.com)  
Please note that the data given  
here has been taken from the  
online catalog. For comprehensive  
information and data, please refer  
to the user documentation. The  
General Terms and Conditions of  
Use apply to Internet downloads.

**Technical data****Mechanical characteristics**

External cable diameter	4 mm ... 8.5 mm
Cable exit	Angled
Color	Bare metallic
Ambient temperature (operation)	0 °C ... 70 °C

**Material data**

Inflammability class according to UL 94	V0
Housing material	ABS
Housing surface material	Metal-plated
Degree of protection	IP20

**Address**

Phoenix Contact  
Rua Gino Cesaro  
BR-05038-140 Sao Paulo-SP / 169 - Água  
Branca,Brazil  
Phone +55/11/3871-6400  
Fax +55/11/3871-6401  
<http://www.phoenixcontact.com.br>



© 2012 Phoenix Contact  
Technical modifications reserved;